


DURACELL[®] PLUS[™]

Alkaline-Manganese Dioxide Battery

MN1203


Size: MN1203 (3LR12)

Zn/MnO₂

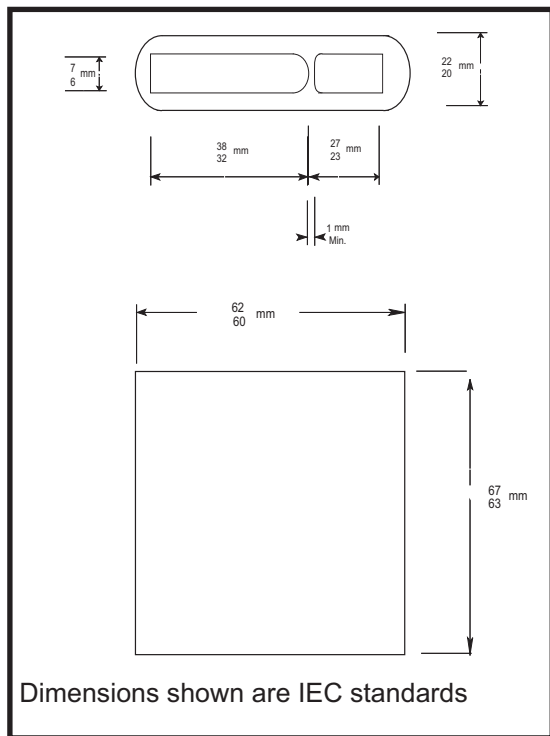


Nominal Voltage:	4.5 V
Nominal Internal Impedance:	816 m-ohm @ 1kHz
Average Weight:	154 gm (5.4 oz.)
Volume:	83 cm ³ (5.08 in. ³)
Terminals:	Flat
Operating Temperature Range:	-20°C to 54°C (-4°F to 130°F)
IEC:	3LR12

Typical Discharge at 220 ohm at various Temperatures

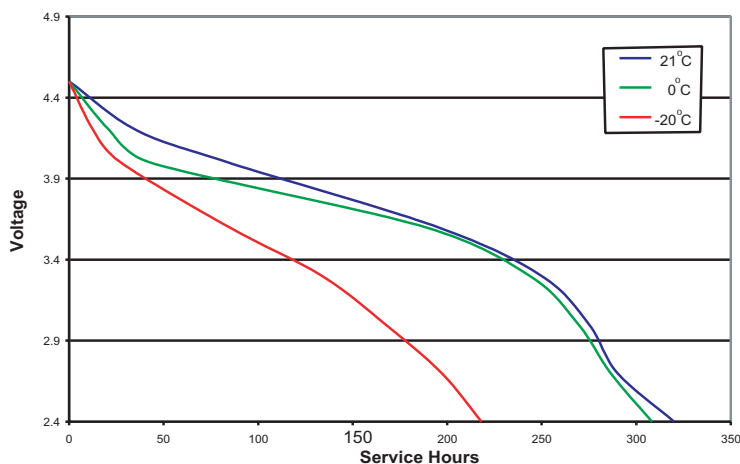

Typical Discharge at 20 ohm at various Temperatures

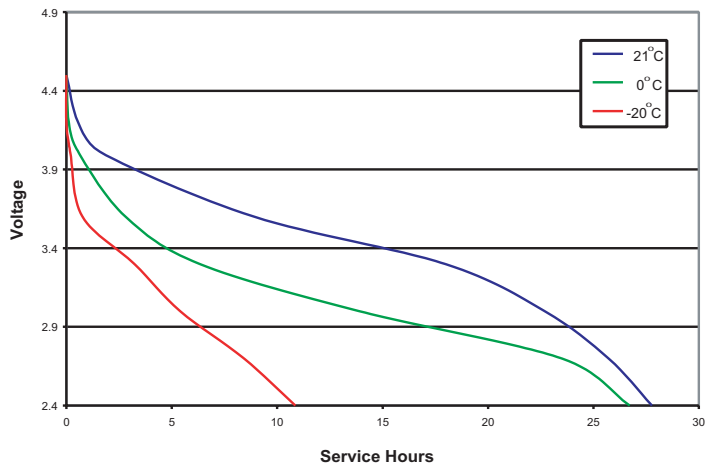

DURACELL[®]
BATTERIES

Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
Internet: www.duracell.com

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.